

Automatic Coffee Brewer with 3 Warmers

Features

Automatic Coffee Brewer

- Model is space-saving 8.5" (21.6 cm) wide.
- All stainless steel construction.
- Hot water faucet and pourover feature on all models.
- SplashGard® funnel deflects hot liquids away from the hand.
- Brew capacity varies by model. See back for details.



CWTF

(2 top warmers)

(decanter sold separately)

Dimensions: 18.9" H x 8.5" W x 17.8" D
(48cm H x 21.6cm W x 45.2cm D)



CWTA

(no faucet)

(decanter sold separately)

For current specification sheets and other information, go to www.bunn.com.

International models may vary in appearance.

Related Products

Easy Clear® EQ-17-TL

Product No. : 30200.1000



Easy Clear® ED-17-TL

Product No. : 30201.1001

Paper Filter Pack

Product No. : 20115.0000

Packed per case: 1,000



Easy Pour® black decanter

Product No. : 06100.0101

Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)



Easy Pour® orange decanter

Product No. : 06101.0101

Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)




Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
CWTFA	12950.0317	230	10.4	1850	2400	5.2 gal./hr. (19.6 L/hr.)	31 lbs. (13.6 kg)	No	CE (PG) V
<i>Power cord</i>	<i>27728.0001</i>								
CWTF35A	12950.0277	230	16.2	3500	3890	6.8 gal./hr. (25.7 L/hr.)	32 lbs. (13.6 kg)	No	CE (PG)
<i>Power cord</i>	<i>27728.0001</i>								
CWTFA	12950.0414	220	10	1850	2200	5.2 gal./hr. (19.6 L/hr.)	31 lbs. (14.1 kg)	No	UL
<i>Power cord</i>	<i>27728.0001</i>								
CWTF35A	12950.0413	220	15	3300	3300	6.8 gal./hr. (25.7 L/hr.)	32 lbs. (14.5 kg)	No	UL
<i>No cord</i>									
CWTA	12950.0317	230	10.4	1850	2400	5.2 gal./hr. (19.6 L/hr.)	31 lbs. (13.6 kg)	No	CE
<i>(no faucet) Power cord</i>	<i>27728.0001</i>								

Brewing capacity: based upon incoming water temp of 60°F/15°C (140°F/60°C rise) per 1/2 gallon. Brew time of 4 minutes.

Electrical: Model requires 2-wires plus ground service rated 220-240V, single phase, 50/60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" male flare fitting.

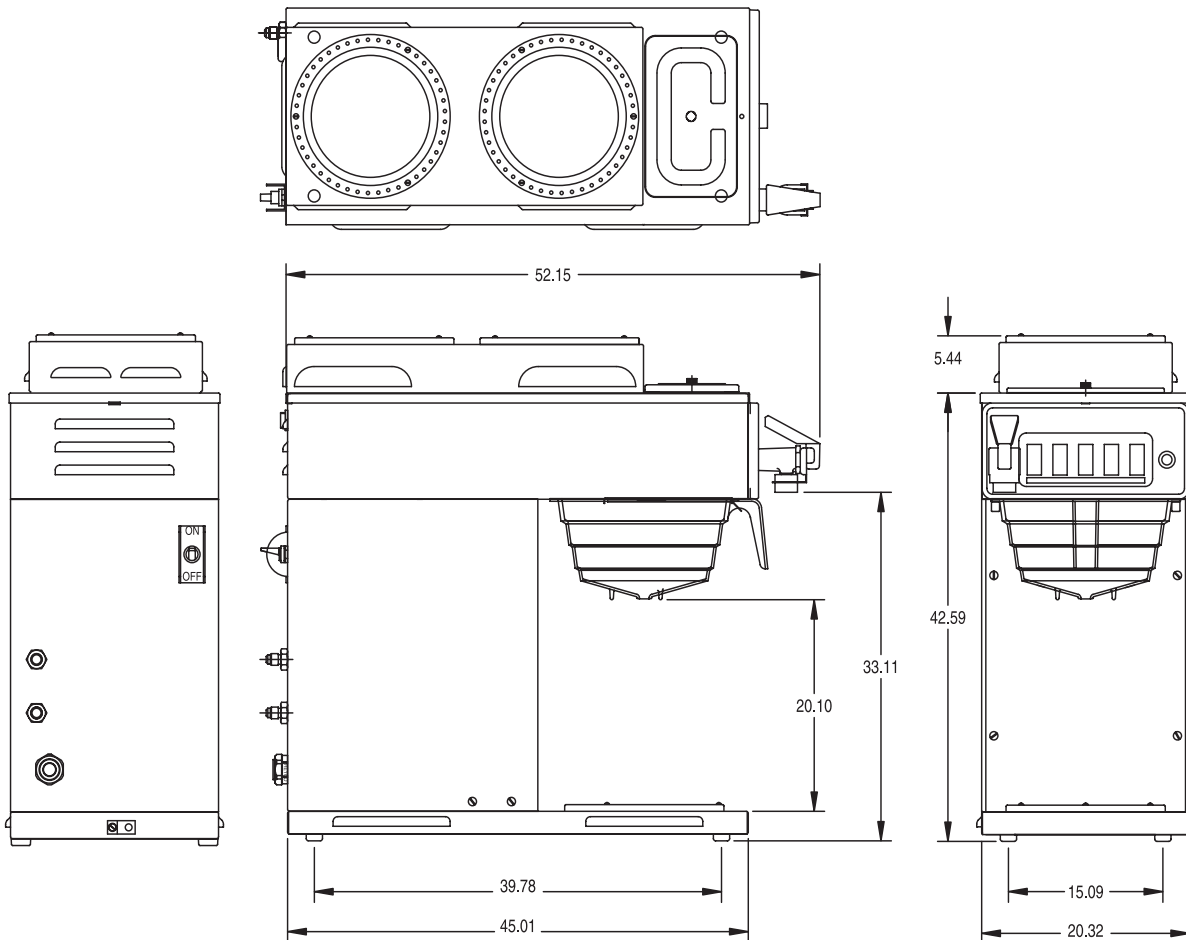

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

8/09 © Bunn-O-Matic Corporation