

Titan® Dual Brewer

Features



Titan Dual Brewer

High-volume brewing solution that features simple operation, precise extraction control and portable servers

- Brews up to 31.8 gallons (120 litres) of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- BrewMETER® allows automatic programming of pulse routine.
- SplashGard® funnel and funnel locks help improve safety.
- Funnel has 28 ounce (.8 kg) ground coffee capacity and paper filter retainers to eliminate fold-over.
- Titan TF servers are insulated to keep coffee hot for hours.
- Hot water faucet.
- 3-phase or single-phase operation.
- Energy-saver mode reduces tank temperature during idle periods.

Titan Dual Brewer with 3 gallon (12 litres) TF Servers *(servers sold separately)*

Dimensions: 40.02" H x 35.63" W x 21.74" D
(101.7cm H x 90.5cm W x 55.2cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-54
Product No. : 39000.0006



Easy Clear® EQHP-54L
Product No. : 39000.0003

Titan/Urn Filter Pack
Product No. : 20111.0000
Packed per case: 250
Dimensions:
20" Base x 8" Sidewall
50.8 cm Base x 20.3 cm Sidewall



Titan TF Server
Product No.: 39400.0001
3 gallon (12 litres)



Titan Funnel
Product No.: 40114.0000



Dimensions & Specifications

Model	Product #	Volts	Amps	Total Watts	Brewing Capacity	Shipping Weight	Funnel Locks	Cord Attached	Agency
Titan Dual	39200.0002	230/400	16	11125	31.8 gal/hr (120 l/hr)	148 lbs. (67.1 kg)	Yes	No	CE
		(3-phase)							
		230*	33.5	8000	21.3 gal/hr (80 l/hr)				
		(1-phase)							
Titan Dual	39200.0003**	200	24.3	8400	24 gal/hr (91 l/hr)	148 lbs. (67.1 kg)	Yes	No	
		(3-phase)							
Titan Dual	39200.0006	230/400	16	11125	31.8 gal/hr (120 l/hr)	148 lbs. (67.1 kg)	Yes	No	INMETRO model
		(3-phase)							
		230*	33.5	8000	21.3 gal/hr (80 l/hr)				
		(1-phase)							

Brewing capacity: based upon incoming water temp of 15°C (78°C rise).


*Brewer can easily be rewired in the field for single-phase operation.

Electrical: Brewer is 4-wires plus ground service rated 230/400V, 3-phase, 50/60Hz.

*Brewer is 3-wires plus ground service rated 230V, 1-phase, 50/60Hz.

**Brewer is 3-wires plus ground service rated 200V, 3-phase, 50/60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with $\frac{3}{8}$ " male flare fitting, and back-flow prevention. 4 gal/min (15.2 l/min) requirement. Tank capacity: 14 gallons (53 L)

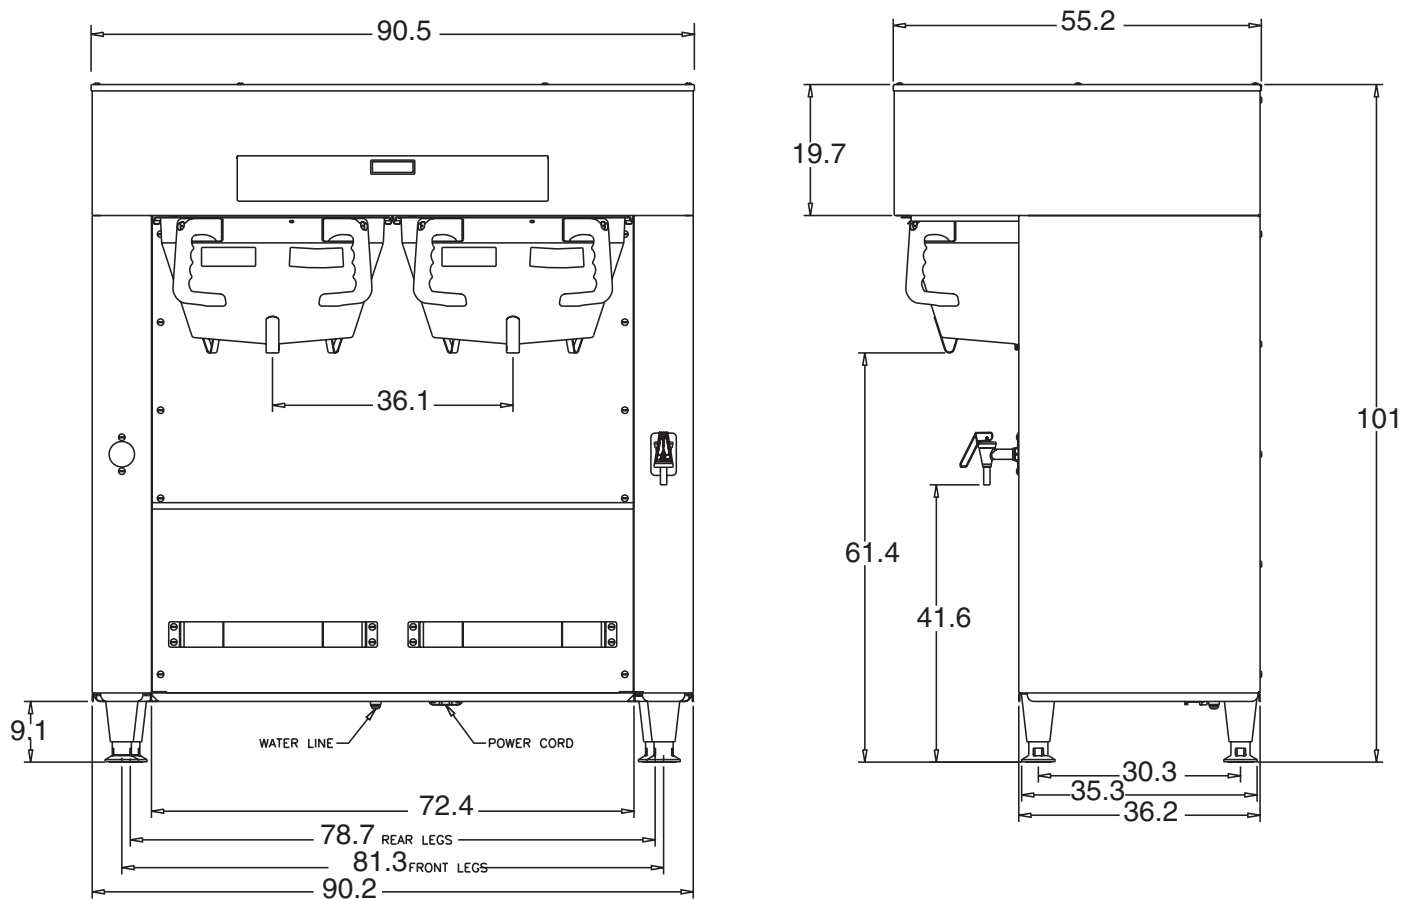

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

10/12 © Bunn-O-Matic Corporation