



Ovens


ADVANCE ovens


GAS ADVANCE OVEN, AG-202

19011108



<u>DIMENSIONS</u>			<u>Article</u>	<u>Packed</u>	GAS ADVANCE OVEN, AG-202 High quality, fast cooking : - Professional quality - Easy to use and efficient - Perfect results - Affordable Capacity for 40 1/1-GN trays or 20 2/1-GN trays. Stainless steel burner with electronic control system with sparking plug ignition. Frequency modulation for the convection burner. Push-button and “Scrolling” controls. 5 cooking methods: Steam, Low-temperature steam, Regeneration, Combination and Convection (up to 300°C). Preheating option. Overnight cooking or low-temperature programme. 3 Speeds - 2 power ranges. Cold-Down chamber cooling system. “Auto-reverse” system to reverse fan rotation. Electronic temperature probe. Steam generator equipped with limescale detector. Steam generator automatically empties every 24 hours of cooking. Semi-automatic limescale removal system. Error detection system. “Repair service” mode system. IPX-5 protection. Retractable shower. Built-in trolley and structure for trays. Power intake: 230 V -1+N - 1.2 KW. Gas heating capacity: 79,120 Kcal/h. (92 kW). Dimensions: 1,162 x 1,074 x 1,841 mm.
Length	mm	1.162,00	1.200,00		
Depth	mm	1.074,00	1.200,00		
Height	mm	1.841,00	2.000,00		
Weigth	Kg	405,00	430,00		
Volumen	m3	2,30	2,88		
<u>ELECTRICITY</u>					
<u>Electric power</u>	KW		2,00		
230V -1+N		2x1,5+T - 10 A			
230V - III					
400V - III+N					
<u>PLUMBING - WATER</u>					
Water consumption (lit/h)			30,00		
Pressure (Kg/cm2)			2 - 4		
<u>GAS</u>					
Power	KW		65,00		
	Kcal/h		55.900,00		
LPG	Consumption (kg/h)		3,50		
	Pressure (g/cm2)		37,00		
Natural Gas	Consumption (m3/h)		5,00		
	Pressure (g/cm2)		18,00		
<u>STEAM</u>			Not used		
<u>AIR</u>			Not used		
<u>LEVEL SOUND</u>			(dB)	62,00	
Certificate EQNET- CE				99BL580	

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	987	870	110		Prever Interruptor diferencial
COLD WATER	1.076	581	110	3/4"	Prever llave de corte en la toma
SOFT COLD WATER	1.073	511	110	3/4"	Prever llave de corte en la toma
DRAIN	90	160	110	1"	
EXHAUST	841	238	1.900	120	
GAS	1.000	510	110	R.3/4"G	Prever regulador y llave de corte individual



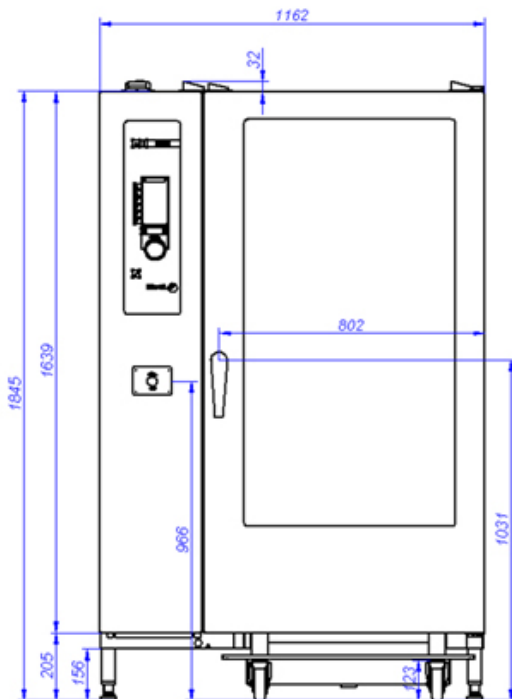

AG-202

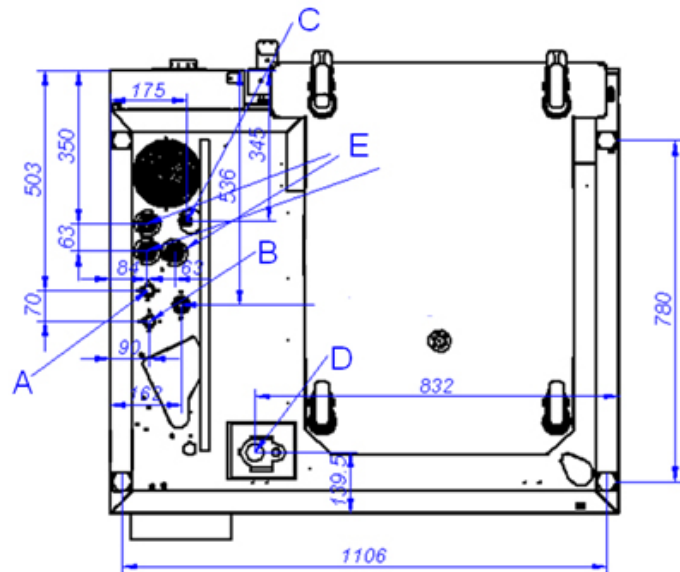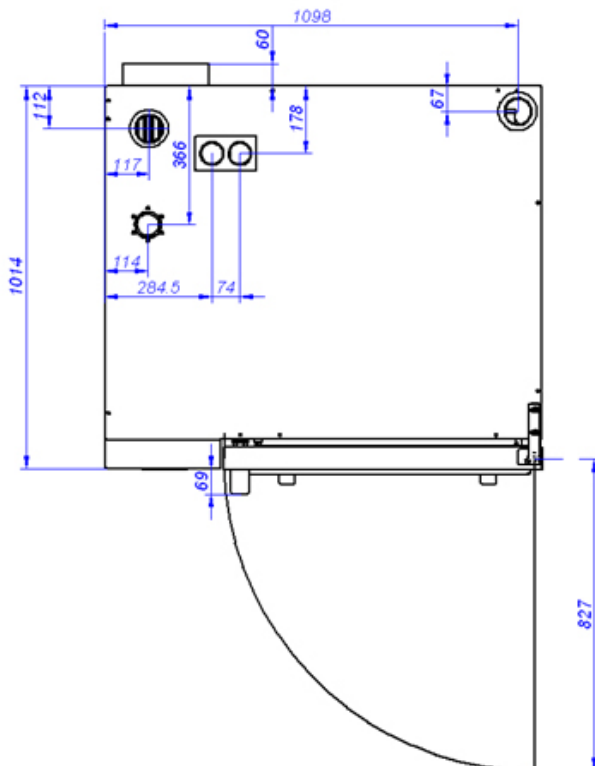

VISTA DE LA BASE DESDE LA PARTE INFERIOR
VIEW FROM THE BOTTOM OF THE MACHINE

A: Entrada de agua blanda
B: Entrada de agua dura
D: Desagüe

C: Alimentación eléctrica

E: Entrada de gas

F: Entrada de aire

A: Soft water inlet

B: Water inlet

D: Drain

C: Electrical connection

E: Gas inlet

F: Air