

## REFRIGERATED PREP TABLES



RR192

RR283

### SPECIFICATIONS FOR: RR152, RR192, RR243, RR283 & RR324

- Exterior Finish: The exterior front, sides, top and doors are stainless steel. The bottom and back are galvanized steel.
- Interior Finish: Interior liner and interior door panel are smooth aluminum.
- Insulation: The complete cabinet and doors are foamed-in-place with polyurethane insulation.
- Hardware: Pull door handles, one adjustable gray epoxy shelf per door, four casters.
- Electrical: 115/60/1, cord and plug furnished.
- Refrigeration: Base mount refrigeration system. Separate temperature controls for the pan well and storage areas. Automatic defrost in the storage area with a separate power switch in the pan well area for easy manual defrost. Refrigerated preparation tables may be built in on three sides. The air intake and exhaust is through the base of the unit. Maximum operating sound level 56-59 dBA. Operating temperature: +33°F to +41°F in pan well area, +34°F to +38°F in storage area.
- Approvals: UL listed \*\*  
C-UL listed \*\*  
UL Sanitation listed to NSF #7 \*\*



## STANDARD FEATURES

- Air-cooled condensing unit
- Automatic defrost in storage area
- Manual defrost in pan well area
- Expansion valve control
- Casters
- Stainless steel exterior (galvanized back)
- Stainless steel doors
- Pan well holds (maximum):
  - RR152: (6) 1/3 or (12) 1/6 size
  - RR192: (8) 1/3 or (16) 1/6 size
  - RR243: (9) 1/3 or (18) 1/6 size
  - RR283: (11) 1/3 or (22) 1/6 size
  - RR324: (12) 1/3 or (24) 1/6 size
  - Pans not included
- Maximum operating sound level 56-59 dBA
- Operating temperature: +33°F to +41°F in pan well area, +34°F to +38°F in storage area
- Polyurethane insulation
- Raised pan well
- Stainless steel lids for pan well

## STANDARD FEATURES

- Stocked for same day shipment
- Gray epoxy shelves
- UL, C-UL & UL Sanitation listed to NSF #7 \*\*
- Warranties: 3 year parts and labor, 5 year compressor

## OPTIONAL FEATURES \*

- 6" legs
- Cutting board (20" deep)
- Door locks
- Full door pan slides
- Painted enamel front, back and sides
- Polycarbonate pans
- Refrigerated drawers (set of 2 per door opening) except right door
- Stainless steel exterior (S/S back)
- Stainless steel interior
- Stainless steel pans

\* Most options are available two weeks from receipt of order. Please contact us for specific questions.

\*\* C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

\*\* UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.


## SPECIFICATIONS

| MODELS                     | RR152        | RR192        | RR243        | RR283        | RR324        |
|----------------------------|--------------|--------------|--------------|--------------|--------------|
| Crated Weight (lbs) (kg)   | 420 (189)    | 450 (203)    | 470 (212)    | 480 (216)    | 490 (221)    |
| Crated Height (in) (cm)    | 50-1/4 (126) | 50-1/4 (126) | 50-1/4 (126) | 50-1/4 (126) | 50-1/4 (126) |
| Crated Width (in) (cm)     | 53 (133)     | 65 (163)     | 77 (193)     | 89 (223)     | 101 (253)    |
| Crated Depth (in) (cm)     | 40-1/2 (101) | 40-1/2 (101) | 40-1/2 (101) | 40-1/2 (101) | 40-1/2 (101) |
| Interior Height (in) (cm)  | 17-1/2 (44)  | 17-1/2 (44)  | 17-1/2 (44)  | 17-1/2 (44)  | 17-1/2 (44)  |
| Interior Width (in) (cm)   | 43-1/2 (109) | 55-1/2 (139) | 67-1/2 (169) | 79-1/2 (199) | 91-1/2 (229) |
| Interior Depth (in) (cm)   | 28-1/4 (71)  | 28-1/4 (71)  | 28-1/4 (71)  | 28-1/4 (71)  | 28-1/4 (71)  |
| Overall Height (in) (cm)   | 43-1/2 (109) | 43-1/2 (109) | 43-1/2 (109) | 43-1/2 (109) | 43-1/2 (109) |
| Overall Width (in) (cm)    | 47-3/4 (119) | 59-3/4 (149) | 71-3/4 (179) | 83-3/4 (209) | 95-3/4 (239) |
| Overall Depth (in) (cm)    | 35 (88)      | 35 (88)      | 35 (88)      | 35 (88)      | 35 (88)      |
| Gross Cubage (CuFt) (L)    | 15 (425)     | 19 (538)     | 24 (679)     | 28 (792)     | 32 (906)     |
| Number of Doors            | 2            | 2            | 3            | 3            | 4            |
| Number of Shelves          | 2            | 2            | 3            | 3            | 4            |
| Shelf Area (SqFt) (Sqm)    | 15.3 (1.4)   | 19.9 (1.8)   | 24.3 (2.2)   | 28.9 (2.7)   | 33.4 (3.1)   |
| Number of Casters          | 4            | 4            | 4            | 4            | 4            |
| Condensing Unit Size       | 1/4 HP       | 1/4 HP       | 1/3 HP       | 1/3 HP       | 1/3 HP       |
| Refrigerant                | R-134a       | R-134a       | R-134a       | R-134a       | R-134a       |
| Electrical Characteristics | 115/60/1     | 115/60/1     | 115/60/1     | 115/60/1     | 115/60/1     |
| Cord & Plug Furnished      | Yes          | Yes          | Yes          | Yes          | Yes          |
| NEMA Plug Configuration    | 5-15P        | 5-15P        | 5-15P        | 5-15P        | 5-15P        |
| Total Amp Draw             | 9.1          | 8.5          | 8.8          | 8.8          | 8.8          |




Specifications subject to change without notice.





**RR152**

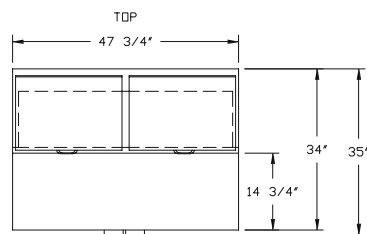


DOOR OPENINGS  
WIDTH: 20 1/4"  
HEIGHT: 18"

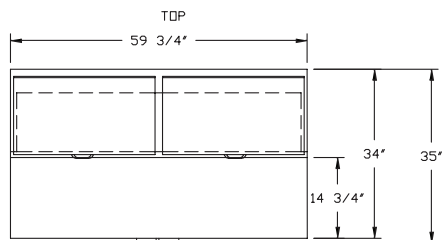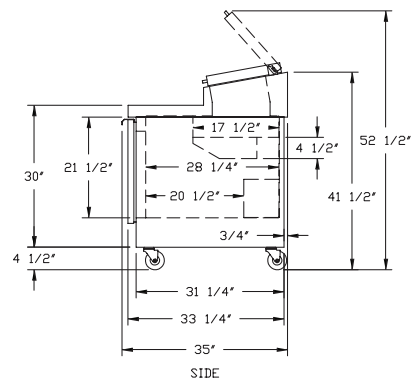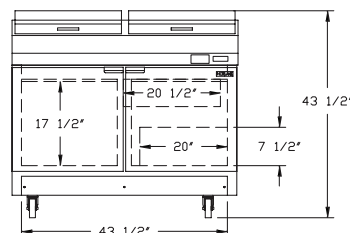



DOOR OPENINGS  
WIDTH: 26 1/4"  
HEIGHT: 18"

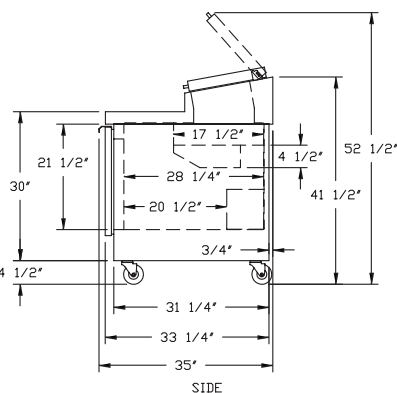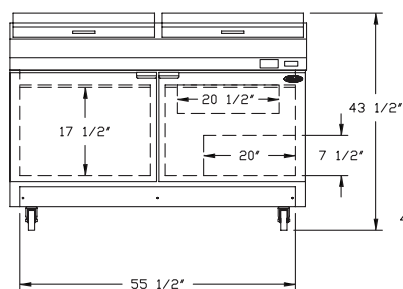


**RR192**

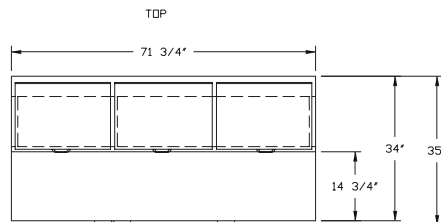

DOOR OPENINGS  
WIDTH: 20 1/4"  
HEIGHT: 18"

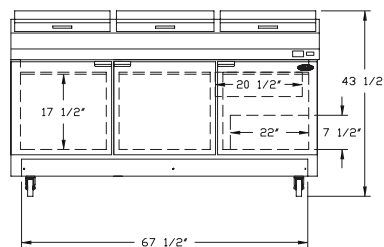


**RR243**

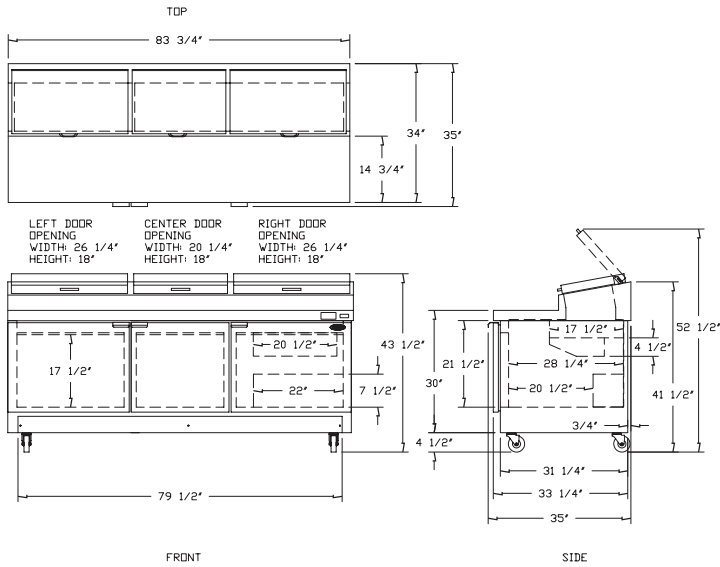

**RR283**



**RR324**

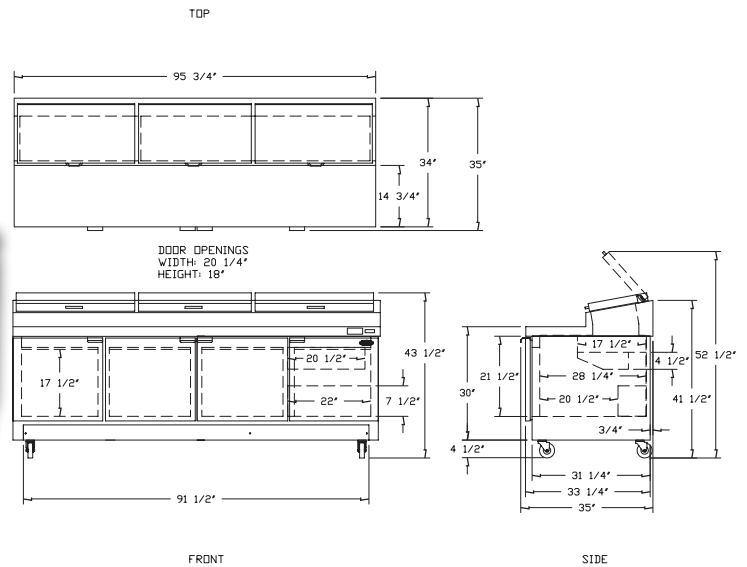

**NORLAKE**®

NOR-LAKE, INC  
Revision Date: 01/14  
© 2014 NOR-LAKE, INC.  
Printed in the U.S.A.  
Part Number: 095231



Nor-Lake, Inc.  
Registered to ISO 9001:2008  
File No. 10001816

