

NOR-LAKE, INCORPORATED
727 Second Street
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-4291 FAX
www.norlake.com



NOVA™ ROLL-IN REFRIGERATORS



PROJECT:

ITEM NUMBER:

MODEL NUMBER:

1 & 2 DOOR ROLL-INS

SPECIFICATIONS FOR: WR331, WR722

- **Exterior Finish:** Exterior front, sides and doors are stainless steel. The exterior top, bottom and back are galvanized steel. All exterior joints and seams fold in without lap joints. No exposed raw edges.
- **Interior Finish:** Interior liner and interior door pan are stainless steel. The interior floor is 22 gauge stainless steel.
- **Insulation:** The complete cabinet and door(s) are foamed in place with polyurethane insulation.
- **Hardware:** Heavy duty, pivot hinges; centered key locks; horizontal work flow handle; self adjusting magnetic gaskets. Each unit comes with interior bumper/cart guides made of stainless steel.
- **Electrical:** All models are standard with complete perimeter, anti-condensate door opening heater wires and an interior LED light activated by switches for each door.
- **Instrumentation:** Microprocessor with digital display and Hi/Lo audio/visual alarm.
- **Refrigeration:** Complete top mounted refrigeration system, not taking space from the food zone. A copper tube, aluminum fin coated evaporator. The condensate is collected and automatically evaporated from a hot gas evaporator pan increasing the efficiency of the system. Refrigerant flow is controlled by a capillary tube system. R-134a Refrigerant. Operating temperature: +36°F.
- **Approvals:** UL Safety and Sanitation listed **

STANDARD FEATURES

- Air cooled condensing unit
- Automatic condensate evaporation
- Automatic defrost
- Cart guides
- Digital thermometer
- Door opening heaters
- Capillary tube system
- Horizontal work flow handle
- Magnetic gasketing
- Operating temperature: +36°F

OPTIONAL FEATURES*

- Recessed interior light
- Stainless steel interior and exterior
- Stocked for same day shipment
- UL Safety and Sanitation listed **
- Warranties: 3 year parts & labor, 5 year compressor

- Alarm systems
- Temperature recorder
- Thermal expansion valve




Nor-Lake, Inc.
Registered to ISO 9001:2008
File No. 10001816


* Most options are available two weeks from receipt of order. Please contact us for specific questions.

** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


** UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

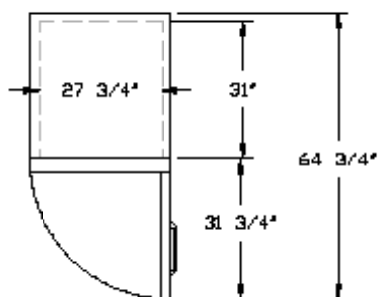

TOP
WR331

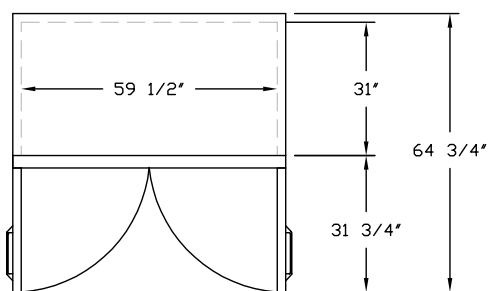

TOP
WR722

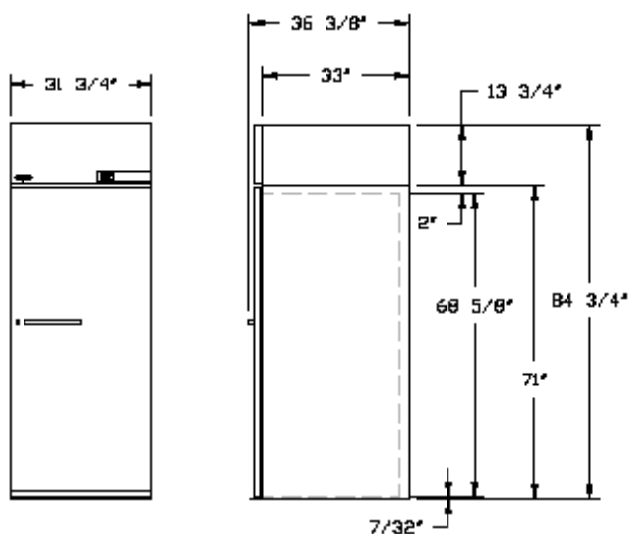

FRONT


WR331

SIDE

SPECIFICATIONS

Models	WR331	WR722
<i>Crated Weight (lbs) (kg)</i>	402 (181)	605 (272)
<i>Crated Height (in) (cm)</i>	88-1/2 (221)	88-1/2 (221)
<i>Crated Width (in) (cm)</i>	38-1/4 (238)	64-1/2 (161)
<i>Crated Depth (in) (cm)</i>	40-3/8 (101)	40-3/8 (101)
<i>Interior Height (in) (cm)</i>	68-5/8 (172)	68-5/8 (172)
<i>Interior Width (in) (cm)</i>	27-3/4 (69)	59-1/2 (149)
<i>Interior Depth (in) (cm)</i>	31 (78)	31 (78)
<i>Overall Height (in) (cm)</i>	84-3/4 (212)	84-3/4 (212)
<i>Overall Width (in) (cm)</i>	31-3/4 (79)	63-1/2 (159)
<i>Overall Depth (in) (cm)</i>	36-3/8 (91)	36-3/8 (91)
<i>Gross Cubage (CuFt) (L)</i>	34.2 (968)	72.5 (2052)
<i>Condensing Unit Size</i>	1/3 HP	1/2 HP
<i>Electrical Characteristics</i>	115/60/1	115/60/1
<i>Cord & Plug Furnished</i>	Yes	Yes
<i>NEMA Plug Configuration</i>	5-15P	5-15P
<i>Total Amp Draw</i>	7.7	11.8

Specifications subject to change without notice.

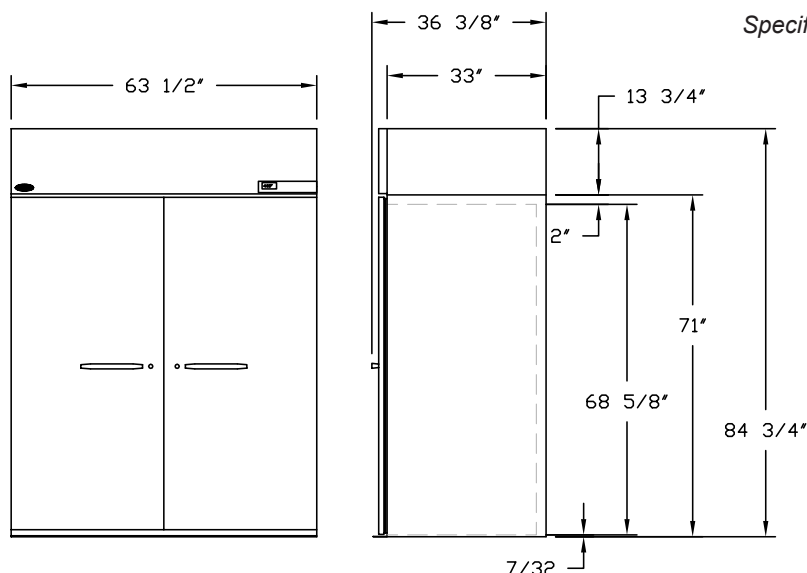

FRONT

WR722

SIDE



Revision Date: 03/14
© 2014 NOR-LAKE, INC.
Printed in the U.S.A.
Part Number: 040349