

Snapshot

The **QTSFT-1** is a single cartridge water treatment system with a 15" Qwik-Twist cartridge. It utilizes ion-exchange resin to remove hardness minerals eliminating lime-scale deposits. The system takes out dirt and sediment down to 10 microns.

System Benefits

- Improves the quality and consistency of cold and hot beverages.
- Reduces maintenance frequency and cost, and extends equipment life.
- Reduces sediment and lime-scale.
- Mounting bracket and full-flow inlet shut-off valve makes installation simple.
- 1/4 turn Qwik-Twist bayonet cartridges make changing the filters quick and simple.

ITEM #: _____ QTY: _____
JOB NAME/NUMBER _____




Application

ESPRESSO MACHINES
TEA BREWERS
BUN WARMERS AND
SMALL TABLE-TOP STEAMERS

Installation Tips

- Feed-water connection to system should be COLD only.
- Do not exceed system specifications for temperature and pressure.
- Allow 3" clearance below system for filter housing removal and cartridge replacement.
- Detailed installation, operation & maintenance manual is included with each system.
- No activation procedure is required for system to perform as specified.

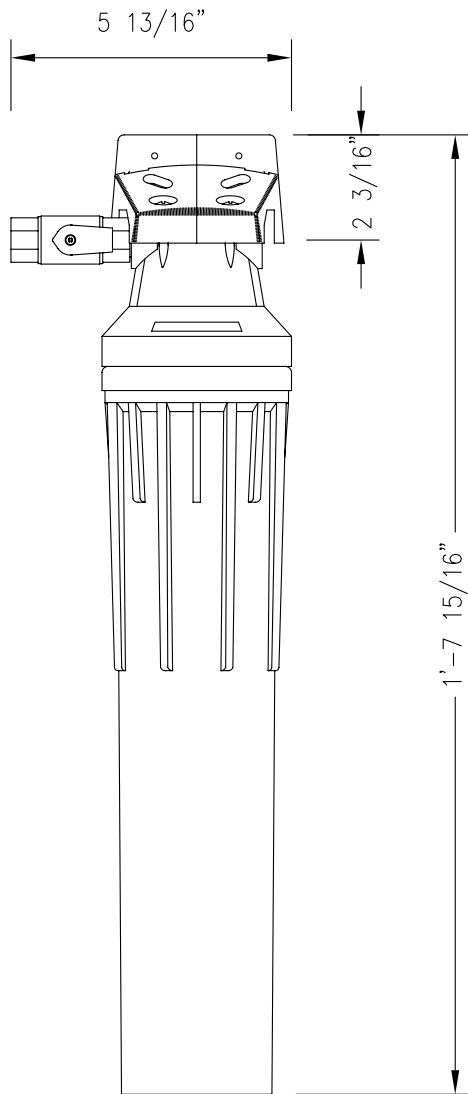

This product is for commercial use only and must be installed and maintained according to manufacturers guidelines.

Do not use on water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Dealer/Distributor Info:

► Specifications

System	
Dimensions (Height x Width X Depth, inches)	20" x 8" x 4"
Connection - Inlet & Outlet	3/8" FNPT
Operating Pressure Range	10-125 psi (0.7 -8.6 bar)
Inlet Water Temperature Range	35° -100° F (2° -38° C)
Shipping Weight	XX lbs.
Performance	
Service Flow Rate	0.5 gpm (1.9 lpm)
Sediment Reduction	10 micron (nominal)
Hardness Removal	1,800 grains

To calculate softening system capacity - divide the "Hardness Removal" capacity of the system by the grains per gallon (gpg) of water hardness.

Example: 1,800 grains capacity/7 gpg = 257 gallons capacity.

If hardness is provided in mg/l units divide the value of mg/l by 17.1 to get grains per gallon of water hardness. Example: 120 mg/l of hardness/17.1= 7 gpg.

► Replacement Cartridge(s)

Model	Part Number	Qty
SFT-Q	300-05890	2

It is recommended that filters be changed when capacity is reached, when effluent pressure or flow becomes inadequate or at a minimum every six (6) months.

► Warranty

Systems have a 3 year warranty against defects in material and workmanship. For complete warranty information contact OptiPure customer service or go to the OptiPure website.

OptiPure, Mfg. by Procam Controls, Inc.
2605 Technology Dr., Bldg 300
Plano, TX 75074
p: 972.881.9797; f: 972.422.6262
www.optipurewater.com